

MD60 B

MD60 BT

MD40

MD40 T

WEATHER PROOF LOUDSPEAKERS

- Durable UV stable ABS plastic cabinet
- Wide frequency range, high efficiency two-way system with ingress protected bass reflex port
- Weather-proof to IP 44
- Standard colours black or white
- Available in 8 ohm or 100V line versions MD-60 is available with transformer on request: 70/50 Volt line


- Secondary switch tapings:
1/1 60,0 W
1/2 30,0 W
1/4 15,0 W
1/8 7,5 W
1/16 3,5 W

Extremely light and solid ABS sound speaker

- 2 way bass reflex system
- 40W/80W nominal/maximum power
- 60Hz-20 kHz frequency response
- Sensitivity 87 dB 1W/1m
- Maximum sound pressure 103 dB, Max/Min 90°C/20°C
- Terminal board connectors
- Protection index IP44
- Size (WxHxD) 155x240x226
- Weight 2.6 Kg
- Stainless steel fixing bracket

Extremely light and solid ABS sound speaker

- Same characteristics as the MD40 model
- 100V

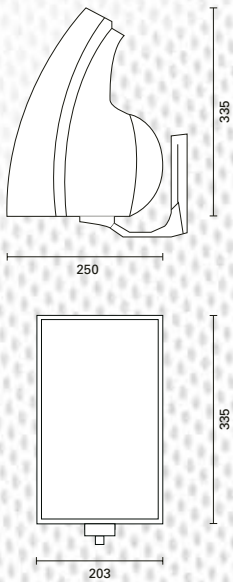

	MD 60 B/W	MD 60 BT/WT	MD 40 B/W	MD40 BT/WT
Code	23727/21648	23376/23119	29462/29307	29131
Material / Colour	ABS / Black or White		ABS / Black or White	
Mounting	Bracket (included)		Bracket (included)	
Terminazioni	screw terminal		screw terminal	
IP-rating	44		44	
Max. / min. amb. temp	90°C / -20°C		90°C / -40°C	
Standard version	8 Ω		8 Ω	
Power (Rated/Max.)	60W/100W		40W/60W	
SPL 1W/1m	90dB		87dB	
SPL 100 W/1m	109dB		103dB	
Frequency response	45-20.000 Hz		60-20.000 Hz	
Dispersion (-6dB) 1 kHz / 4 kHz	110° / 55°		-	
Directivity factor, Q (2 kHz)	6,4		-	
Weight	2,9 kg		2,6 kg	
Dimensions (WxHxD)	203x335x250mm		203x335x250mm	