

CS 3030/T**CS 3040/T****CS 3060/T**

COLUMN SPEAKERS

Column speaker with aluminium body


- Power 30 Watt RMS with 70-100V transformer and 7.5/15/30W power selection
- Frequency response 200Hz-16kHz
- Sensitivity 91dB
- Maximum SPL 106dB
- five 2" loudspeakers
- Horizontal dispersion (-6dB) 1kHz/4kHz 180°/120°

Column speaker with aluminium body

- Power 40 Watt RMS with 70-100V transformer and 10/20/40W power selection
- Frequency response 200Hz-16kHz
- Sensitivity 94dB
- Maximum SPL 110dB
- ten 2" loudspeakers
- Horizontal dispersion (-6dB) 1kHz/4kHz 180°/120°

Column speaker with aluminium body

- Power 60 Watt RMS with 70-100V transformer and 15/30/60W power selection
- Frequency response 200Hz-15kHz
- Sensitivity 96dB
- Maximum SPL 114dB
- fifteen 2" loudspeakers
- Horizontal dispersion (-6dB) 1kHz/4kHz 180°/120°

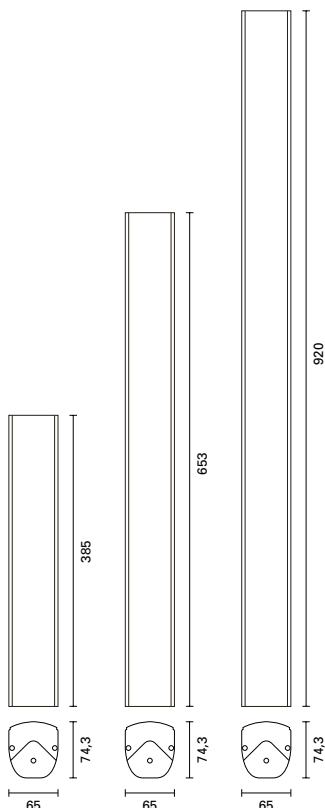

CS3030/T



CS3040/T



CS3060/T

SC A2**Wall fastening bracket**

Code 20130

	CS 3030/T	CS 3040/T	CS 3060/T
Code	20128	20131	20129
Power (R.M.S.)	7,5-15-30W - 100V	10-20-40W - 100V	15-30-60W - 100V
Sensitivity 1W/1m	91dB	94dB	96dB
Frequency response (± 6dB)	200÷16.000Hz	200 ÷ 16.000Hz	200 ÷ 15.000Hz
Loudspeakers	N° 5 x 2"	N° 10 x 2"	N° 15 x 2"
Cabinet	Aluminium	Aluminium	Aluminium
Weight	1,94 Kg	3,4 Kg	4,63 Kg
Dimensions (WxHxD)	65x385x74,3mm	65x653x74,3mm	65x920x74,3mm