


MHS 50T

MUSIC HORN

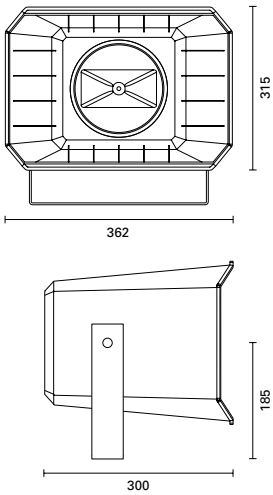

ABS and polypropylene watertight (IP66) two-way DNH music horn


- Wide frequency-response and wide dispersion angle
- Stainless steel adjustable bracket, ABS light grey body treated to be resistant to sunlight
- Sealed with silicone gasket
- 50Watt power with 100V transformer



	MHS 50T
Code	29431
Rated/Maximum power	50W
Colour	Light Grey RAL 7035
Frequency response	90-20.000Hz
Sensitivity 1W/1m	99dB
Weight	3,9 Kg
Dimensions (WxHxD)	362x315x300mm

HS 50T

HORN

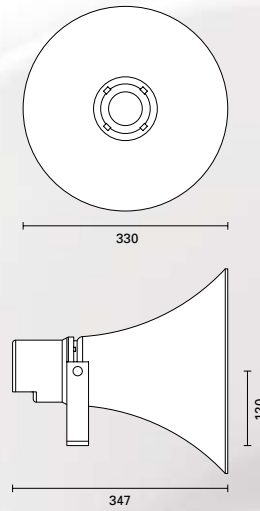

ABS watertight (IP66) two-way music horn

- 100V line transformer and driver
- High-pass filter for driver protection, suitable for internal and external environments with temperature between -25°C e +70°C
- Colour white RAL7035
- Stainless steel bracket
- Double insulation



	HS 50T
Code	29422
Rated/Maximum power	50W
Colour	Light Gray RAL 7035
Frequency response	380-6.500Hz
Sensitivity 1W/1m	109dB
Maximum SPL 1m	126dB
Input voltage	100Volt
Operating temperature	from 85°C to -20°C
Weight	2,3 Kg
Dimensions	∅ 330x347mm