


CAD 20 T

ABS SOUND PROJECTORS

ABS Sound projector watertight

- In-built UV protection IP55
- Aluminium U bracket
- Dual cone polypropylene speaker
- Power 20 Watt
- 100V transformer
- Max/min operating temperature 85 C°/-20°C
- SPL 1W/1m 92dB
- Dispersion (-10dB) 1kHz/4kHz 180°/70°

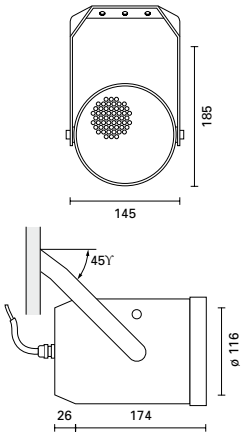


SP 106 WP

ABS SOUND PROJECTORS

IP44 Weatherproof ABS sound projector

- Power 1.5/3/6W
- 50/70/100V transformer
- Complete with steel bracket
- 5.5" plastic loudspeaker
- Frequency response 150-20kHz
- Max/min operating temperature 85 C°/-20°C
- SPL@1W/1m 94dB
- Dispersion (-10dB) 1kHz/4kHz 150°/50°

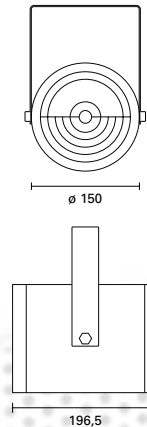

IP44 Weatherproof ABS sound projector

- Power 1.5/3/6W
- 50/70/100V transformer
- Complete with stainless steel bracket
- 5.5" plastic loudspeaker
- Frequency response 150-20kHz
- Max/min operating temperature 85 C°/-20°C
- SPL@1W/1m 94dB
- Dispersion (-10dB) 1kHz/4kHz 150°/50°

	CAD 20 T
Code	11469
Features	Dual cone loudspeaker with transformer
Mounting system	Stainless steel U bracket
Rated/Maximum power	20 Watt
Colour	White
Frequency response	110-18.000 Hz
Sensitivity 1W/1m	92dB
Maximum SPL 1m	105dB
Input voltage	100/70 Volt
Operating temperature	da -20°C a 85°C
Weight	1,9 Kg
Dimensions	ø 138x200mm

	SP 106 WP	SP 106 B/WP
Code	15810	18069
Features	IP44 Weatherproof sound projector	Bi-directional IP44 Weatherproof sound projector
Mounting system	Stainless steel U bracket	Stainless steel U bracket
Rated/Maximum/Power	6 Watt, 3 Watt, 1,5 Watt	6 Watt, 3 Watt, 1,5 Watt
Colour	White	White
Frequency response	150-20 kHz	150-20 kHz
Sensitivity 1W/1m	94dB	94dB
Maximum SPL 1m	101dB	101dB
Input voltage	100/70/50 Volt	100/70/50 Volt
Operating temperature	da 85°C a -20°C	da 85°C a -20°C
Weight	2,2 Kg	2,2 Kg
Dimensions	ø 150x196,5mm	ø 150x196,5mm