

**CESL 10T****CESL 20T****CESL 10T BIDI**

ALUMINIUM SOUND PROJECTORS

**GB 820/T**

SPHERICAL SPEAKER

**Watertight (IP55) sound projector**


- White RAL9016 painted aluminium
- Polypropylene dual cone loudspeaker
- 10/5/2.5/1.25 Watt power
- 100V Transformer
- Maximum/minimum operating temperature 85 C°/-20 C°
- SPL 1W/1m 91dB
- Dispersion (-10dB) 1kHz/8kHz 150°/50°

**Watertight (IP55) sound projector**


- White RAL9016 painted aluminium
- Polypropylene dual cone loudspeaker
- 20/10/5Watt power
- 100V Transformer
- Maximum/minimum operating temperature 85 C°/-20 C°
- SPL 1W/1m 92dB
- Dispersion (-10dB) 1kHz/8kHz 150°/50°

**Watertight (IP55) sound projector**

- White RAL9016 painted aluminium
- Polypropylene dual cone loudspeaker
- 10/5/2.5 Watt power
- 100V Transformer
- Maximum/minimum operating temperature 85 C°/-20 C°
- SPL 97dB@100V 5W
- Dispersion (-6dB) 1kHz/160° 110°/40° for each direction

**ABS IP55-rated spherical speaker to be mounted on the ceiling, ideal for large area coverage**

- Coaxial 8" speaker playing both voice and music, extremely clear voice play
- 360° horizontal and 140° vertical dispersion
- 20 Watt power
- 100V Transformer
- Equipped with 5 m cable

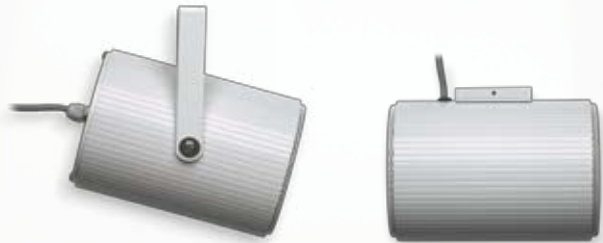

	<b>CESL 10T</b>	<b>CESL 20T</b>	<b>CESL 10T-BIDI</b>
<b>Code</b>	<b>29420</b>	<b>29421</b>	<b>29429</b>
<b>Rated/Maximum power</b>	10/5/2.5/1.25W	20/10/5W	10/5/2.5W
<b>Frequency response</b>	130Hz:15.000Hz	110Hz:15.000Hz	130Hz:15.000Hz
<b>Sensitivity 1W/1m</b>	91dB	92dB	91dB
<b>Input voltage</b>	100V	100V	100V
<b>Weight</b>	2,2 Kg	2,8 Kg	2,8 Kg
<b>Dimensions</b>	ø 138x205mm	ø 170x252mm	ø 138x205mm

	<b>GB 820/T</b>
<b>Code</b>	<b>29430</b>
<b>Rated/Maximum power</b>	20W/10W/5W
<b>Frequency response</b>	160Hz:12.500Hz
<b>Sensitivity 1W/1m</b>	93dB
<b>Maximum SPL 1m</b>	106dB
<b>Input voltage</b>	100V
<b>Weight</b>	2,2 Kg
<b>Dimensions</b>	ø 254mm